
MICROPHONE Q930

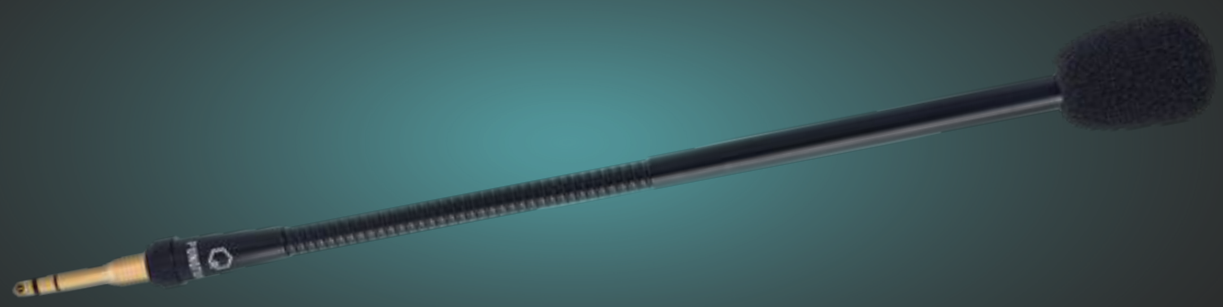

Designed for demanding communication environments, the Q930 gooseneck microphone delivers clear speech and flexible positioning for PunQtum speaker stations and desk or wall-mounted stations.

TECHNICAL SPECIFICATIONS

Electrical

Directional Characteristics	Unidirectional
Frequency Range	100 Hz – 14,000 Hz
Impedance	600 Ω ± 30% (at 1 kHz)
Sensitivity	-64 dB ± 3 dB (0 dB = 1 V/µbar at 1kHz, open circuit)
Operating Voltage	1.5 V – 10 V DC (RL = 680 Ω)

Mechanical

Dimensions	Ø14 × 344 mm
Connector	Ø6.3 mm stereo plug Gold Plated
Finish	Matt black painting
Weight	104 g

Material & Construction

Material	Copper (Cu)
Surface Finish	Matt black paint
Compliance	RoHS compliant
Connector Thread	UNF 7/16”-20
Printing	White text, black background